





## The Beginning

ONERY is one of the kind tiles brand to have emerged as a ceramic expert specializing in slimmest tiles. Established in Morbi in the year 2018 our company wishes to enhance the lives of its customers by delivering surface solutions that are extravagant, elegant & efficient in performance.

The top management of our company is a mix of experienced entrepreneurs and dynamic youngsters. Together we strive to make the world a more aesthetically appealing place to live in. With the true mix of multiple components of management and technology, we back ourselves to produce & supply world class tiles. Our target markets are global & hence the quality we wish to deliver will surpass global standards of style, design, trends and manufacturing value.

Our efforts will be targeted towards making ONERY a world class brand that is preferred as first choice for tiles and ceramic products by all stake holders, namely architects, interiors designers, construction contractors and home owners.



### Inspired Designs, **Endless Possibilities**

Let your imagination take flight as you explore our diverse range of tile designs. Whether it's the warmth of rustic textures, the sleekness of contemporary lines, or the timeless allure of classic patterns, DIVINE Series offers tiles that cater to every taste and style.

Elevate kitchens, bathrooms, living spaces, and beyond with the magic of our design diversity. From residential dreams to commercial projects, we empower architects, designers, and homeowners to dream big and bring those dreams to life with tiles that stand the test of time. Experience the fusion of functionality and aesthetics, making spaces speak volumes with the language of exceptional design.

### **Product Features**









Light Weight

Easy Install

Flat Surface

Bending Strength



Easy Drilling















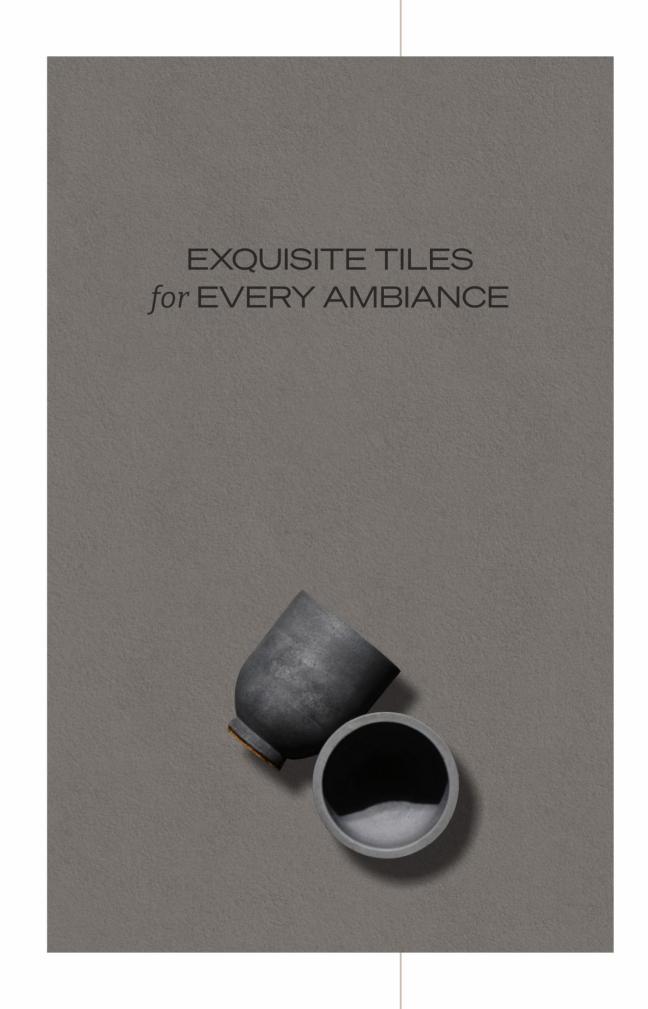

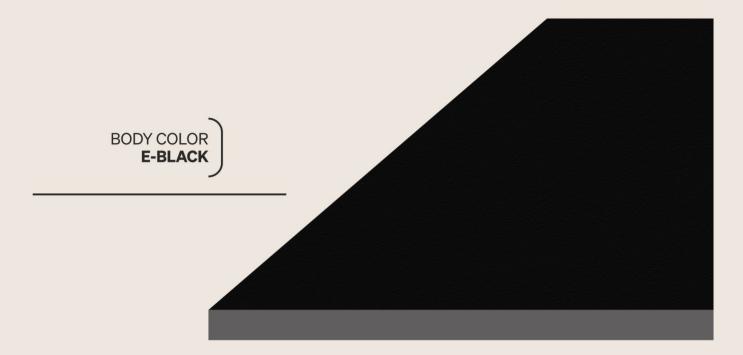



DAIMOND BLACK

SIZE **600X1200MM** 


RANDOM **01 FACES** 

THICKNESS **5MM** 







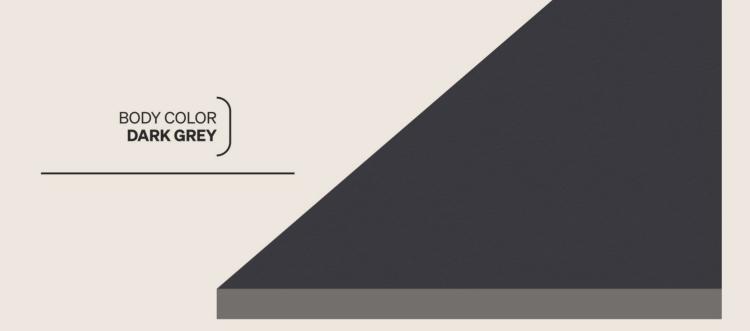



DAIMOND DARK GREY

SIZE **600X1200MM** 

RANDOM 01 FACES

THICKNESS **5MM** 





BODY COLOR LIGHT GREY



DAIMOND GREY

SIZE **600X1200MM** 

RANDOM **01 FACES** 

THICKNESS **5MM** 





BODY COLOR WHITE



DAIMOND WHITE

SIZE **600X1200MM** 

RANDOM 01 FACES

THICKNESS **5MM** 





DIVINE ASH

SIZE **600X1200MM** 

RANDOM **02 FACES** 

THICKNESS **5MM** 

FINISH **GRANULLA** 







BODY COLOR IVORY



DIVINE BIRCH

SIZE **600X1200MM** 

RANDOM 01 FACES

THICKNESS **5MM** 

FINISH **GRANULLA** 






# DIVINE CHALKY

SIZE **600X1200MM** 

RANDOM **02 FACES** 


THICKNESS **5MM** 

FINISH **GRANULLA** 







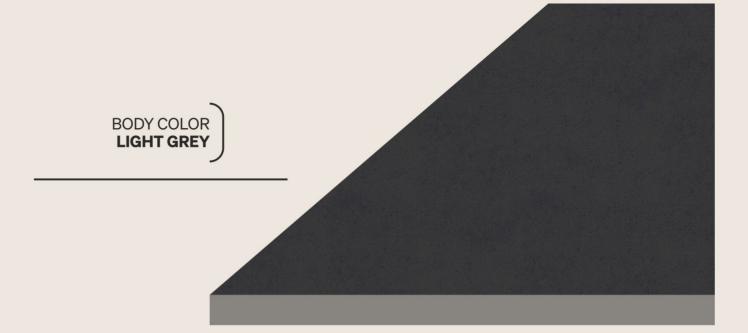



DIVINE CHARCOAL

SIZE **600X1200MM** 


RANDOM 01 FACES

THICKNESS **5MM** 

FINISH **GRANULLA** 





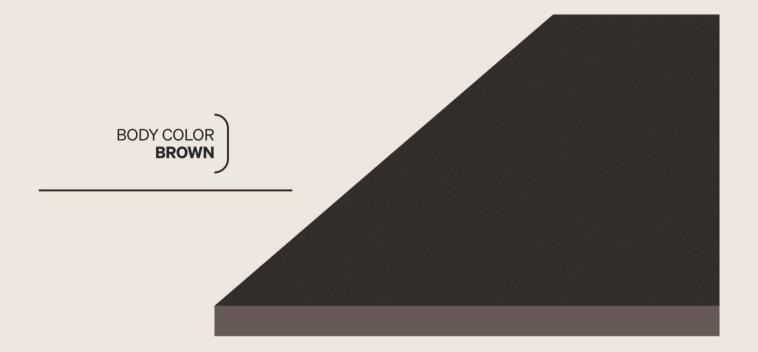



**DIVINE COFFEE** 

SIZE **600X1200MM** 

RANDOM **01 FACES** 


THICKNESS **5MM** 

**FINISH GRANULLA** 







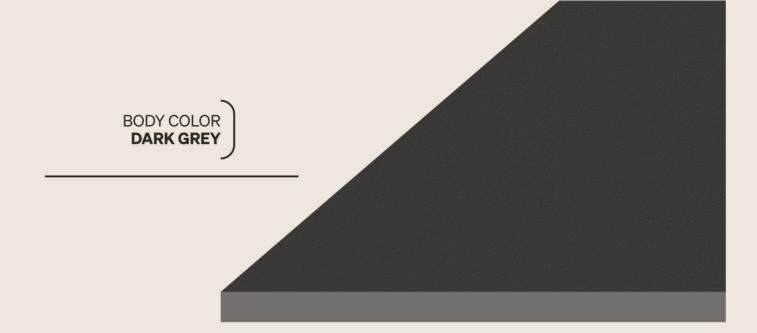



**DIVINE IRON GREY** 

SIZE **600X1200MM** 

RANDOM 01 FACES

THICKNESS **5MM** 

**FINISH GRANULLA** 





BODY COLOR IVORY




# DIVINE LEMON

SIZE **600X1200MM** 


RANDOM **04 FACES** 

THICKNESS **5MM** 

FINISH **GRANULLA** 

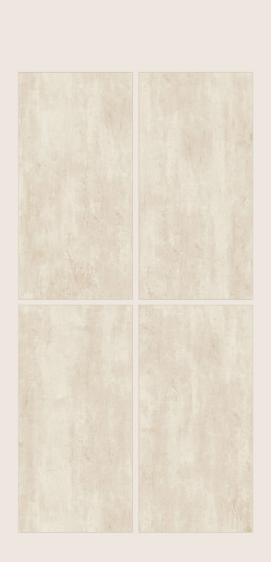



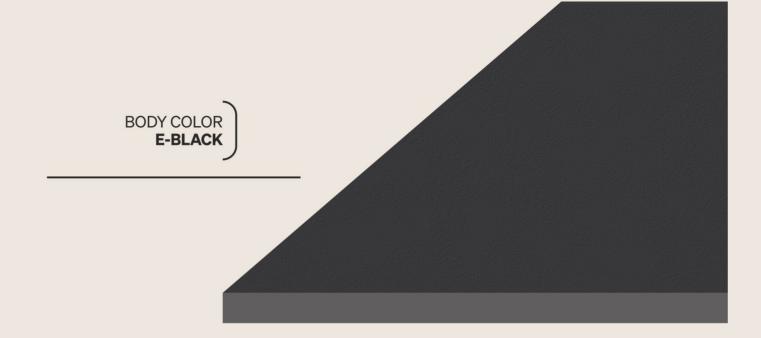



**DIVINE NERO** 

SIZE **600X1200MM** 


RANDOM 01 FACES

THICKNESS **5MM** 

FINISH **GRANULLA** 





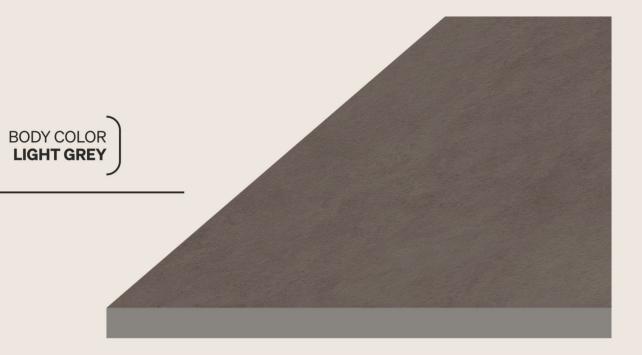




## DIVINE OYSTER

SIZE **600X1200MM** 

RANDOM **03 FACES** 

THICKNESS **5MM** 

FINISH **GRANULLA** 

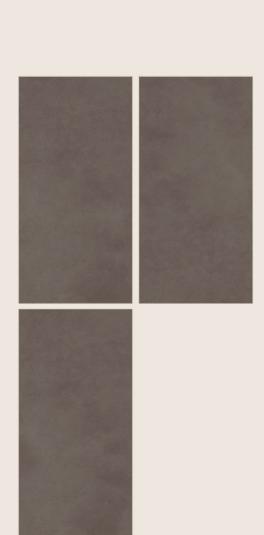





BODY COLOR LIGHT GREY



**DIVINE PEARL GREY** 

SIZE **600X1200MM** 


RANDOM 01 FACES

THICKNESS **5MM** 

**FINISH GRANULLA** 





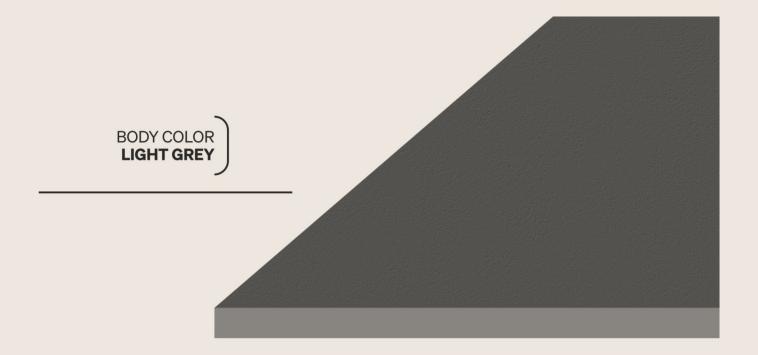



**DIVINE SEAL GREY** 

SIZE **600X1200MM** 


RANDOM **01 FACES** 

THICKNESS **5MM** 

**FINISH GRANULLA** 





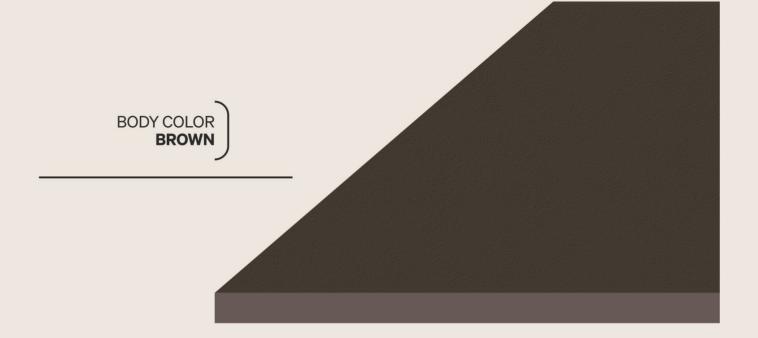



**DIVINE TAN BROWN** 

SIZE **600X1200MM** 


RANDOM 01 FACES

THICKNESS **5MM** 

**FINISH GRANULLA** 





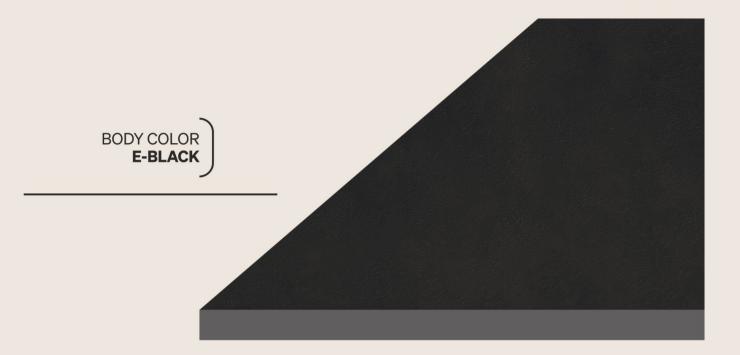



SERIES


DIVINE BLACK

SIZE **600X1200MM** 

RANDOM **03 FACES** 

THICKNESS **5MM** 

FINISH **GRANULLA** 

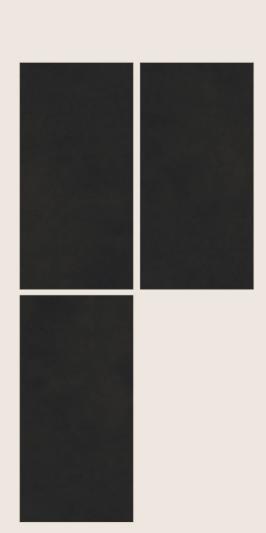

## TECHNICAL SPECIFICATION

| DIMENSION &<br>SURFACE QUALITY | STANDARD AS PER<br>ISO13006 En14411 Gr.Bla | ONERY MEAN<br>VALUE | METHOD OF<br>TESTING |
|--------------------------------|--|---------------------|----------------------|
| Deviation in Length and Width  | ± 0.5 %                                    | ± 0.1 %             | ISO 10545-2          |
| Deviation in Thickness         | ± 0.5 %                                    | ± 4.0 %             | ISO 10545-2          |
| Straightness in Side           | ± 0.5 %                                    | ± 0.1 %             | ISO 10545-2          |
| Rectangularity                 | ± 0.5 %                                    | ± 0.1 %             | ISO 10545-2          |
| Surface Flatness               | ± 0.5 %                                    | ± 0.1 %             | ISO 10545-2          |
| Color Difference               | Unaltered                                  | No Change           | ISO 10545-2          |

#### STRUCTURAL PROPERTIES

| Water Absorption | ≤ 0.5 %    | ≤ 0.1 %     | ISO 10545-3 |
|------------------|------------|-------------|-------------|
| Apparent Density | > 2.0 g/cc | > 2.20 g/cc | DIN 51082   |

#### **SURFACE MECHANICAL PROPERTIES**

| Surface Abrasion | As per mfg. | Min. Class - 4 | ISO 10545-7 |
|------------------|-------------|----------------|-------------|
| MOH's Hardness   | As per mfg. | Min. 7         | EN 101      |

#### THERMO HYGROMETRIC PROPERTIES

| Frost Resistance               | No Damage                 | No Damage                 | ISO 10545-12 |
|--------------------------------|---------------------------|---------------------------|--------------|
| Thermal Shock Resistance       | No Damage                 | No Damage                 | ISO 10545-9  |
| Moisture Expansion             | Nil                       | Nil                       | ISO 10545-10 |
| Linear Thermal Expansion (CEO) | Max. 9.0x10 <sup>-6</sup> | Max. 6.5x10 <sup>-6</sup> | ISO 10545-8  |

#### CHEMICAL PROPERTIES

| Chemical Resistance         | No Damage |            | ISO 10545-13 |
|-----------------------------|-----------|------------|--------------|
| Cleaning Products           | No Damage | UA         | ISO 10545-13 |
| Pool Salts                  | No Damage | UA         | ISO 10545-13 |
| Weak Concentration          | No Damage | ULA        | ISO 10545-13 |
| High Concentration          | No Damage | UHA        | ISO 10545-13 |
| Release of Lead and Cadmium | No Damage | No Release | ISO 10545-15 |
| Stain Resistance            | Resistant | Class - 4  | ISO 10545-14 |

#### **SEFTY PROPERTIES**

| Fire Resistance | As per mfg. | Class A1 FL (Flooring) Class A1 (Wall) | EN 13501  |
|-----------------|-------------|--|-----------|
| Skid Resistance | As per mfg. | >R9                                    | DIN-51130 |

#### MASSIVE MECHANICAL PROPERTY

| TEST               | TESTING METHOD<br>AND ISO VALUE | DETERMINATION              | UNIT  | ONERY VALUE |
|--------------------|---------------------------------|----------------------------|-------|-------------|
| Bending Resistance | ISO-10545-4                     | Breaking Strength          | N     | 700         |
|                    |                                 | Modulus of Rupture         | N/mm2 | 40          |
| Impact Test        | ISO-10545-5                     | Coefficient of Restitution | -     | 0.6         |



#### PACKAGING DETAILS

| Dimensions | No. of Pcs/Box | Square Feet | Weight (Approx) |
|------------|----------------|-------------|-----------------|
| 600x1200mm | 4 Pcs.         | 31 Sq. Ft.  | 32.5 Kgs        |



### ONERY TILES LLP.

Neknam-Mitana Road, Mitana 363 650, Gujarat, INDIA Cell. +91 73730 28222 Mail. onerytiles@gmail.com

www.onerytiles.com