





The Beginning

ONERY is one of the kind tiles brand to have emerged as a ceramic expert specializing in slimmest tiles. Established in Morbi in the year 2018 our company wishes to enhance the lives of its customers by delivering surface solutions that are extravagant, elegant & efficient in performance.

The top management of our company is a mix of experienced entrepreneurs and dynamic youngsters. Together we strive to make the world a more aesthetically appealing place to live in. With the true mix of multiple components of management and technology, we back ourselves to produce & supply world class tiles. Our target markets are global & hence the quality we wish to deliver will surpass global standards of style, design, trends and manufacturing value.

Our efforts will be targeted towards making ONERY a world class brand that is preferred as first choice for tiles and ceramic products by all stake holders, namely architects, interiors designers, construction contractors and home owners.



Timeless classics to avant-garde designs

Elevate your surroundings with us where innovation meets tradition, and each tile tells a story of sophistication and grandeur. Transforming ordinary spaces into extraordinary environments, ELITE Series presents a stunning array of tiles that redefine elegance.

With a commitment to craftsmanship and design excellence, our tiles effortlessly blend functionality with aesthetic appeal. Discover a world where precision meets artistry. Our meticulously crafted tiles are the embodiment of years of expertise, combining innovative techniques with time-honored traditions. Each tile is a masterpiece, reflecting a dedication to quality that resonates through every inch.

Product Features









Easy Drilling

Light Weight

Easy Install



Bending Strength












UNVEILING TILE EXCELLENCE and **CRAFTING DREAMS**



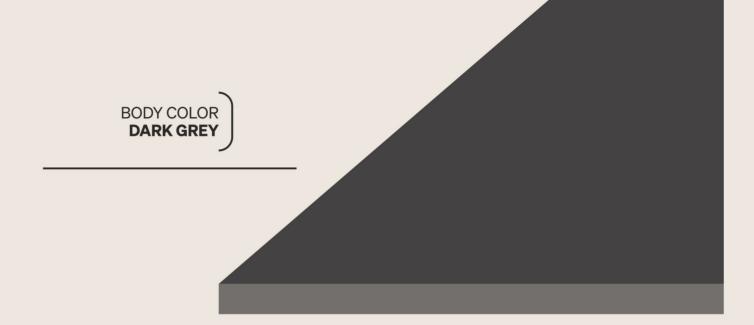




ELITE ASH GREY

SIZE **600X1200MM**

THICKNESS **5MM**



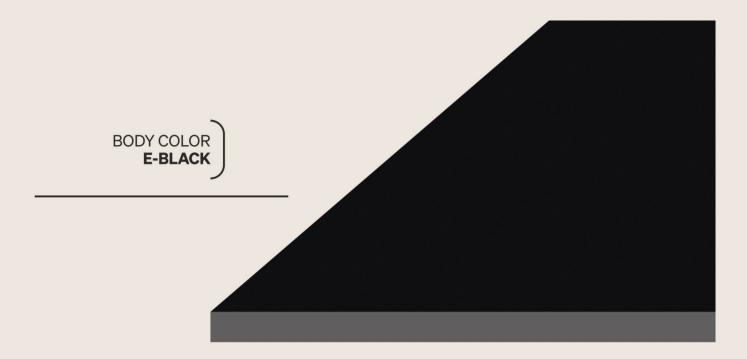



ELITE BLACK


SIZE **600X1200MM**

THICKNESS **5MM**







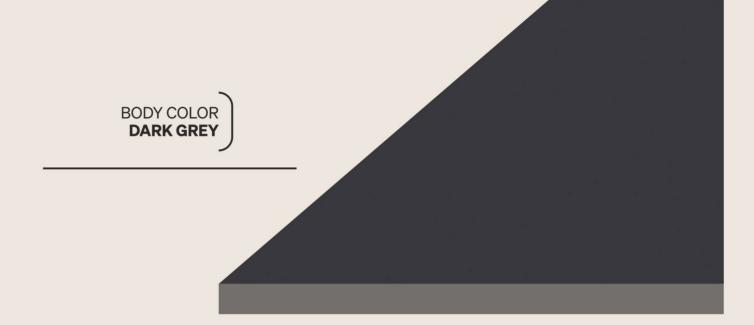



ELITE DARK GREY

SIZE **600X1200MM**

THICKNESS **5MM**





BODY COLOR LIGHT GREY



ELITE DOVE GREY

SIZE **600X1200MM**

THICKNESS **5MM**

FINISH **RUSTIC MATT**

wonervtiles.com



BODY COLOR LIGHT GREY



ELITE GREY

SIZE **600X1200MM**

THICKNESS **5MM**





ELITE IVORY

SIZE **600X1200MM**

THICKNESS **5MM**







ELITE OLIVE

SIZE **600X1200MM**

THICKNESS **5MM**







ELITE PEACH

SIZE **600X1200MM**

THICKNESS **5MM**

FINISH **RUSTIC MATT**

w onervtiles com






ELITE SKY

SIZE **600X1200MM**

THICKNESS **5MM**



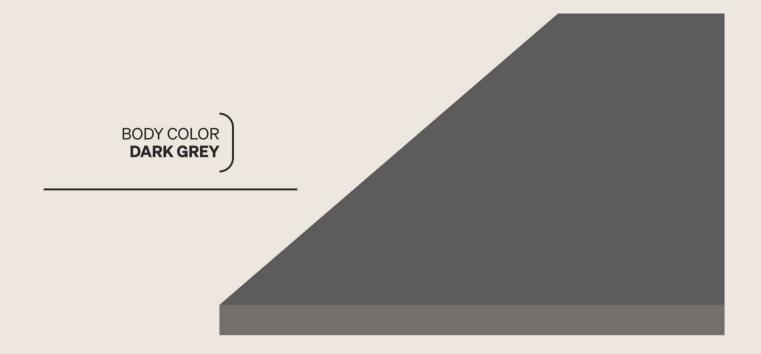



ELITE SMOKE GREY

SIZE **600X1200MM**

THICKNESS **5MM**







ELITE STEEL

SIZE **600X1200MM**

THICKNESS **5MM**





ELITE WARM

SIZE **600X1200MM**

THICKNESS **5MM**







ELITE WHITE

SIZE **600X1200MM**

THICKNESS **5MM**

TECHNICAL SPECIFICATION

| DIMENSION & SURFACE QUALITY | STANDARD AS PER ISO13006 En14411 Gr.Bla | ONERY MEAN VALUE | METHOD OF TESTING |
|--------------------------------|--|---------------------|----------------------|
| Deviation in Length and Width | ± 0.5 % | ± 0.1 % | ISO 10545-2 |
| Deviation in Thickness | ± 0.5 % | ± 4.0 % | ISO 10545-2 |
| Straightness in Side | ± 0.5 % | ± 0.1 % | ISO 10545-2 |
| Rectangularity | ± 0.5 % | ± 0.1 % | ISO 10545-2 |
| Surface Flatness | ± 0.5 % | ± 0.1 % | ISO 10545-2 |
| Color Difference | Unaltered | No Change | ISO 10545-2 |

STRUCTURAL PROPERTIES

| Water Absorption | ≤ 0.5 % | ≤ 0.1 % | ISO 10545-3 |
|------------------|------------|-------------|-------------|
| Apparent Density | > 2.0 g/cc | > 2.20 g/cc | DIN 51082 |

SURFACE MECHANICAL PROPERTIES

| Surface Abrasion | As per mfg. | Min. Class - 4 | ISO 10545-7 |
|------------------|-------------|----------------|-------------|
| MOH's Hardness | As per mfg. | Min. 7 | EN 101 |

THERMO HYGROMETRIC PROPERTIES

| Frost Resistance | No Damage | No Damage | ISO 10545-12 |
|--------------------------------|---------------------------|---------------------------|--------------|
| Thermal Shock Resistance | No Damage | No Damage | ISO 10545-9 |
| Moisture Expansion | Nil | Nil | ISO 10545-10 |
| Linear Thermal Expansion (CEO) | Max. 9.0x10 ⁻⁶ | Max. 6.5x10 ⁻⁶ | ISO 10545-8 |

CHEMICAL PROPERTIES

| Chemical Resistance | No Damage | | ISO 10545-13 |
|-----------------------------|-----------|------------|--------------|
| Cleaning Products | No Damage | UA | ISO 10545-13 |
| Pool Salts | No Damage | UA | ISO 10545-13 |
| Weak Concentration | No Damage | ULA | ISO 10545-13 |
| High Concentration | No Damage | UHA | ISO 10545-13 |
| Release of Lead and Cadmium | No Damage | No Release | ISO 10545-15 |
| Stain Resistance | Resistant | Class - 4 | ISO 10545-14 |

SEFTY PROPERTIES

| Fire Resistance | As per mfg. | Class A1 FL (Flooring) Class A1 (Wall) | EN 13501 |
|-----------------|-------------|--|-----------|
| Skid Resistance | As per mfg. | >R9 | DIN-51130 |

MASSIVE MECHANICAL PROPERTY

| TEST | TESTING METHOD AND ISO VALUE | DETERMINATION | UNIT | ONERY VALUE |
|--------------------|---------------------------------|----------------------------|-------|-------------|
| Bending Resistance | ISO-10545-4 | Breaking Strength | N | 700 |
| | | Modulus of Rupture | N/mm2 | 40 |
| Impact Test | ISO-10545-5 | Coefficient of Restitution | - | 0.6 |



PACKAGING DETAILS

| Dimensions | Dimensions No. of Pcs/Box | | Weight (Approx) |
|------------|---------------------------|------------|-----------------|
| 600x1200mm | 4 Pcs. | 31 Sq. Ft. | 32.5 Kgs |



ONERY TILES LLP.

Neknam-Mitana Road, Mitana 363 650, Gujarat, INDIA Cell. +91 73730 28222 Mail. onerytiles@gmail.com

www.onerytiles.com