


ONERY
BEST NEVER LIES



600X1200MM
TILES BOOK'23

PRISM
A TECHNICAL SURFACE

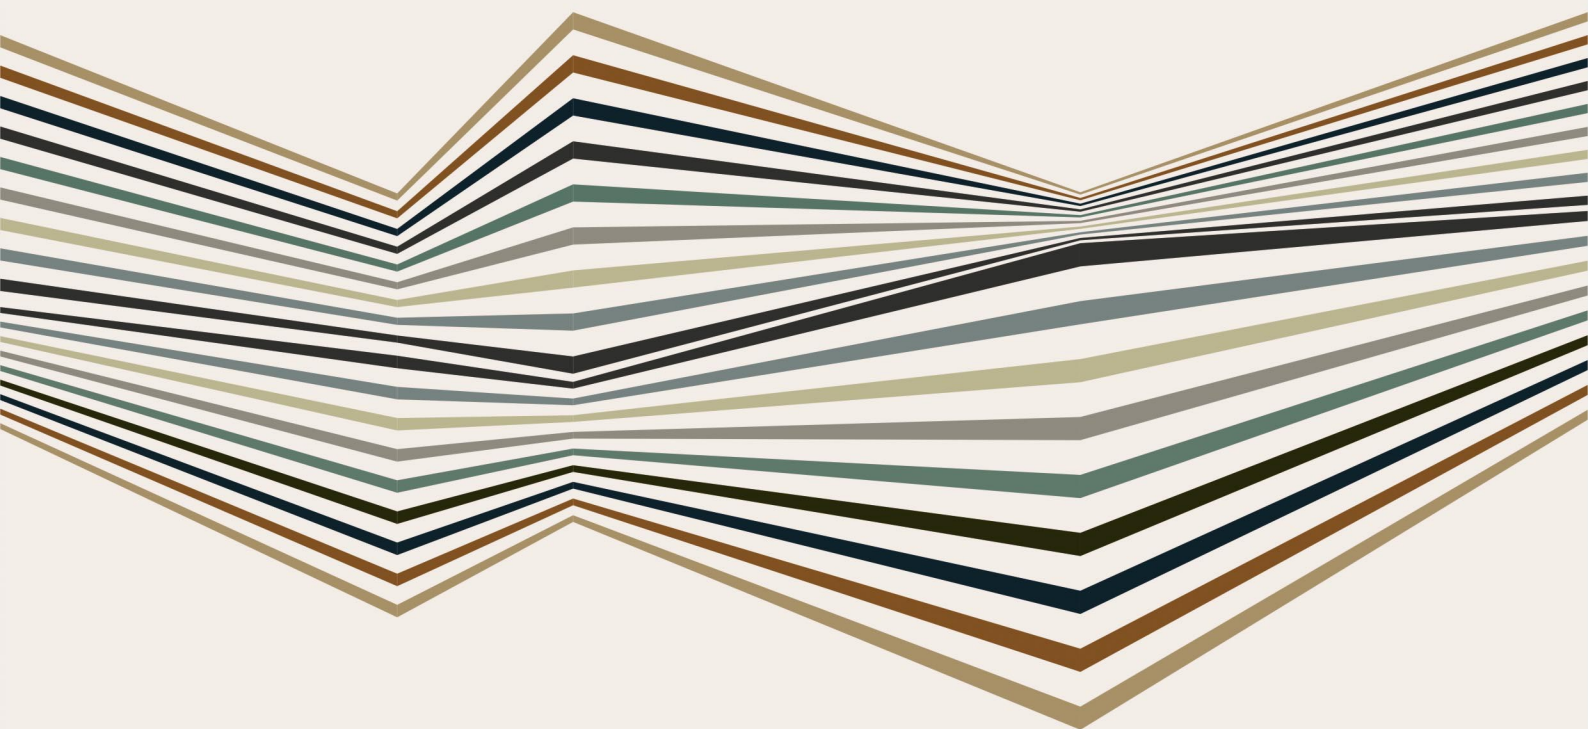


THE BEGINNING

ONERY is one of the kind tiles brand to have emerged as a ceramic expert specializing in slimmest tiles. Established in Morbi in the year 2018 our company wishes to enhance the lives of its customers by delivering surface solutions that are extravagant, elegant & efficient in performance.

The top management of our company is a mix of experienced entrepreneurs and dynamic youngsters. Together we strive to make the world a more aesthetically appealing place to live in. With the true mix of multiple components of management and technology, we back ourselves to produce & supply world class tiles. Our target markets are global & hence the quality we wish to deliver will surpass global standards of style, design, trends and manufacturing value.

Our efforts will be targeted towards making ONERY a world class brand that is preferred as first choice for tiles and ceramic products by all stake holders, namely architects, interiors designers, construction contractors and home owners.

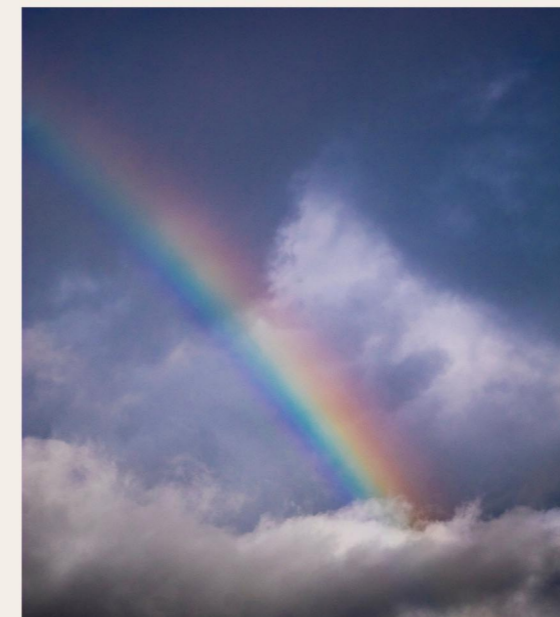

PRISM
A TECHNICAL SURFACE

FULL BODY

At our tile company, we offer a captivating collection of rustic matt tiles in the versatile size of 600x1200mm. Immerse your spaces in the warm embrace of rustic elegance, as our matt finish brings a touch of authenticity and character to your floors and walls.

Discover the perfect balance between rugged charm and modern style, as our rustic matt tiles transform your living spaces into havens of timeless beauty. Let your imagination take flight and create a truly unique atmosphere with our exceptional range of rustic matt tiles.


SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT



TYPE
FULL BODY)

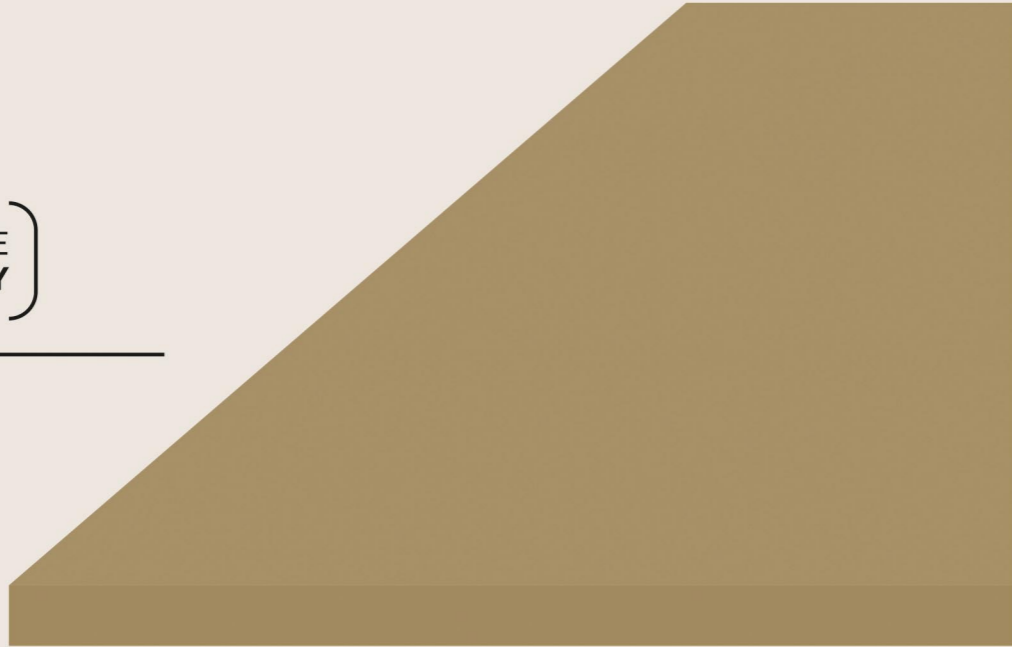

PRISM
A TECHNICAL SURFACE

SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT

**BOTTLED
OLIVE**





Preview of
BOTTLED OLIVE

TYPE
FULL BODY

PRISM
A TECHNICAL SURFACE

SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT

**COOL
BEIGE**

Preview of
COOL BEIGE

TYPE
FULL BODY



PRISM
A TECHNICAL SURFACE

SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT

**DARK
COBALT BLUE**





Preview of
DARK COBALT BLUE

TYPE
FULL BODY

PRISM
A TECHNICAL SURFACE

SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT

**GOLDEN
BROWN**

Preview of
GOLDEN BROWN



TYPE
FULL BODY)



PRISM
A TECHNICAL SURFACE

**LIGNIN
BLACK**



SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT



Preview of
LIGNIN BLACK

TYPE
FULL BODY

PRISM
A TECHNICAL SURFACE

SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT

**MOSS
GREEN**



Preview of
MOSS GREEN

TYPE
FULL BODY



PRISM
A TECHNICAL SURFACE

**OCEAN
BLUE**



SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT

Preview of
OCEAN BLUE



TYPE
FULL BODY

PRISM
A TECHNICAL SURFACE

SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT

**REED
GREEN**




ONERY
BEST NEVER LIES



Preview of
REED GREEN

TYPE
FULL BODY)

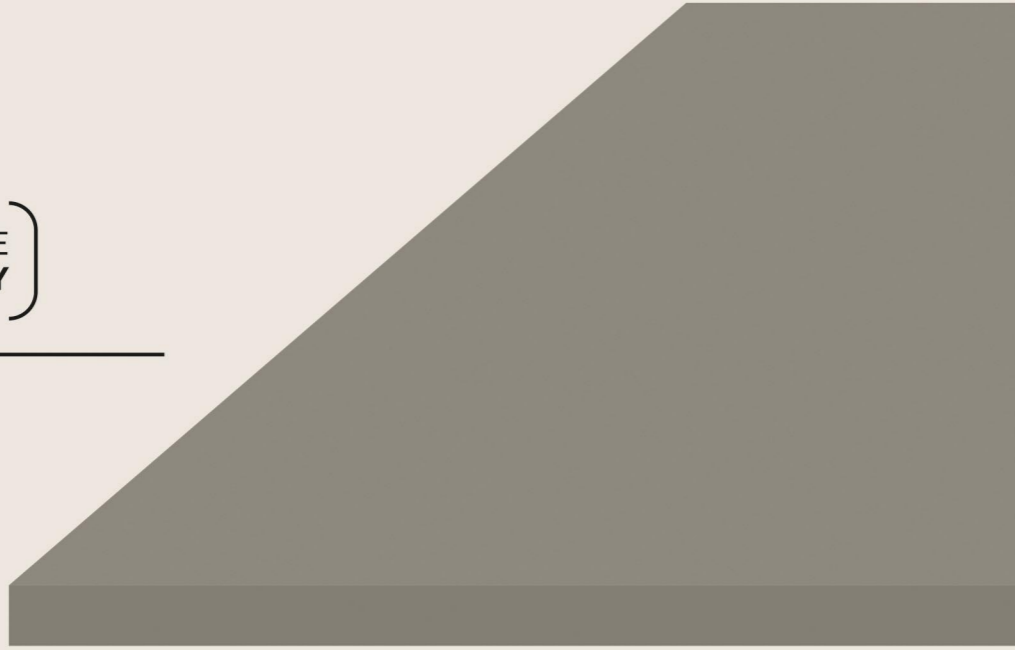

PRISM
A TECHNICAL SURFACE

**RHINO
GREY**



SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT



Preview of
RHINO GREY & STEEL GREY

TYPE
FULL BODY

PRISM
A TECHNICAL SURFACE

SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT

**SILVER
SPRING**




ONERY
BEST NEVER LIES



Preview of
SILVER SPRING

TYPE
FULL BODY

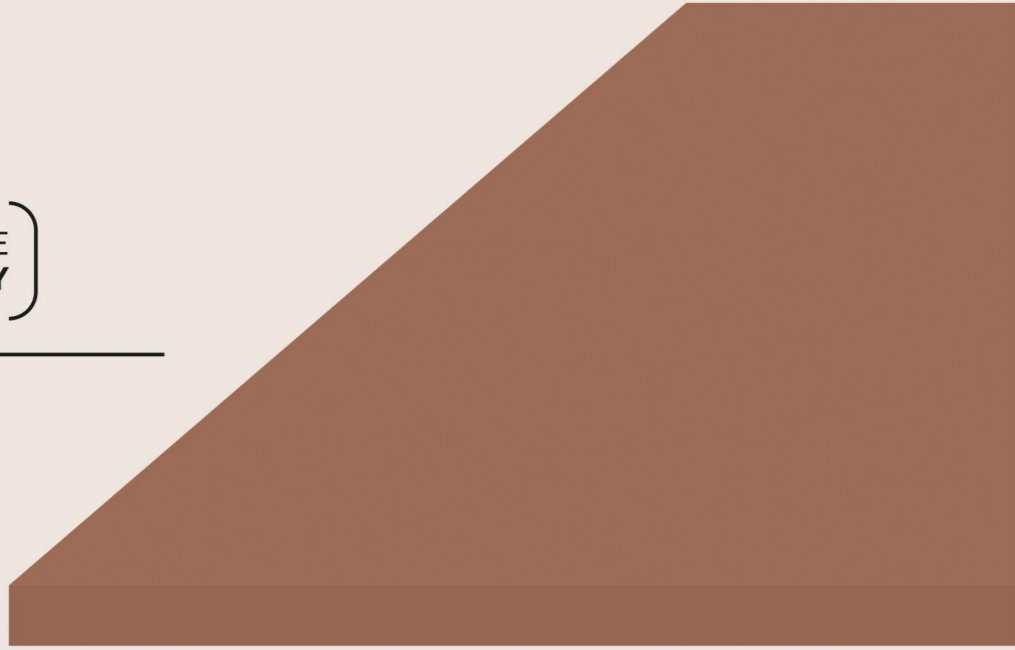

PRISM
A TECHNICAL SURFACE

SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT

**SOFT
PEACH**





ONERY
BEST NEVER LIES

Preview of
SOFT PEACH



TYPE
FULL BODY



PRISM
A TECHNICAL SURFACE

**STEEL
GREY**

SIZE
600X1200MM

THICKNESS
5MM

FINISH
RUSTIC MATT





Preview of
STEEL GREY

TECHNICAL SPECIFICATION

DIMENSION & SURFACE QUALITY	STANDARD AS PER ISO13006 En14411 Gr.B1a	ONERY MEAN VALUE	METHOD OF TESTING
Deviation in Length and Width	± 0.5 %	± 0.1 %	ISO 10545-2
Deviation in Thickness	± 0.5 %	± 4.0 %	ISO 10545-2
Straightness in Side	± 0.5 %	± 0.1 %	ISO 10545-2
Rectangularity	± 0.5 %	± 0.1 %	ISO 10545-2
Surface Flatness	± 0.5 %	± 0.1 %	ISO 10545-2
Color Difference	Unaltered	No Change	ISO 10545-2

STRUCTURAL PROPERTIES

Water Absorption	≤ 0.5 %	≤ 0.1 %	ISO 10545-3
Apparent Density	> 2.0 g/cc	> 2.20 g/cc	DIN 51082

SURFACE MECHANICAL PROPERTIES

Surface Abrasion	As per mfg.	Min. Class - 4	ISO 10545-7
MOH's Hardness	As per mfg.	Min. 7	EN 101

THERMO HYGROMETRIC PROPERTIES

Frost Resistance	No Damage	No Damage	ISO 10545-12
Thermal Shock Resistance	No Damage	No Damage	ISO 10545-9
Moisture Expansion	Nil	Nil	ISO 10545-10
Linear Thermal Expansion (CEO)	Max. 9.0×10^{-6}	Max. 6.5×10^{-6}	ISO 10545-8

CHEMICAL PROPERTIES

Chemical Resistance	No Damage		ISO 10545-13
Cleaning Products	No Damage	UA	ISO 10545-13
Pool Salts	No Damage	UA	ISO 10545-13
Weak Concentration	No Damage	ULA	ISO 10545-13
High Concentration	No Damage	UHA	ISO 10545-13
Release of Lead and Cadmium	No Damage	No Release	ISO 10545-15
Stain Resistance	Resistant	Class - 4	ISO 10545-14

SEFTY PROPERTIES

Fire Resistance	As per mfg.	Class A1 FL (Flooring) Class A1 (Wall)	EN 13501
Skid Resistance	As per mfg.	> R9	DIN-51130

MASSIVE MECHANICAL PROPERTY

TEST	TESTING METHOD AND ISO VALUE	DETERMINATION	UNIT	ONERY VALUE
Bending Resistance	ISO-10545-4	Breaking Strength	N	700
		Modulus of Rupture	N/mm ²	40
Impact Test	ISO-10545-5	Coefficient of Restitution	-	0.6



PACKAGING DETAILS

Dimensions	No. of Pcs/Box	Square Feet	Weight (Approx)
600x1200mm	4 Pcs.	31 Sq. Ft.	32.5 Kgs



ONERY
BEST NEVER LIES

ONERY TILES LLP.

Neknam-Mitana Road, Mitana 363 650,

Gujarat, INDIA

Cell. +91 73730 28222

Mail. onerytiles@gmail.com

www.onerytiles.com